CUTTING SYSTEM SUBMERSIBLE SEWAGE PUMPS “CUT-C5”



TECHNICAL FEATURES


- Specifically designed for pumping untreated waste water from domestic, commercial or municipal sources.
- High discharge pressure allows waste water to be transferred over longer distances.
- The cutting system easily shreds fibrous material in the water, such as gloves, rope and cloth, without winding or clogging.
- Helps to reduce energy consumption and keep downtime costs to a minimum while maintaining peak performance throughout the system life.



CUT-C5



Cutting system

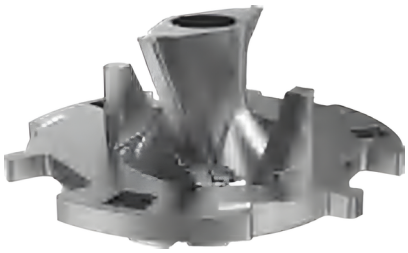

Cutting system

MOTOR

- Two-pole induction motor (n = 2850 rpm)
- Insulation class B; protection IP68
- Continuous service S1
- Thermal protector on single-phase versions
- Single-phase 220 V / 50 Hz (60 Hz on request)
- Three-phase 380 V / 50 Hz (60 Hz on request)

WORKING CONDITION


- Maximum immersion depth 5 m
- Liquid temperature up to 35 °C
- Ambient temperature up to 40 °C

CUTTING SYSTEM SUBMERSIBLE SEWAGE PUMPS “CUT-C5”

MATERIALS

COMPONENT	CONSTRUCTION
Pump body	Cast iron
Motor housing	AISI 201 SS
Impeller	Cast iron
Motor shaft	AISI 304 SS
Mechanical seal	SiC / SiC
Cable	8 m power cable with plug

PERFORMANCE CHART AT n = 2850 RPM

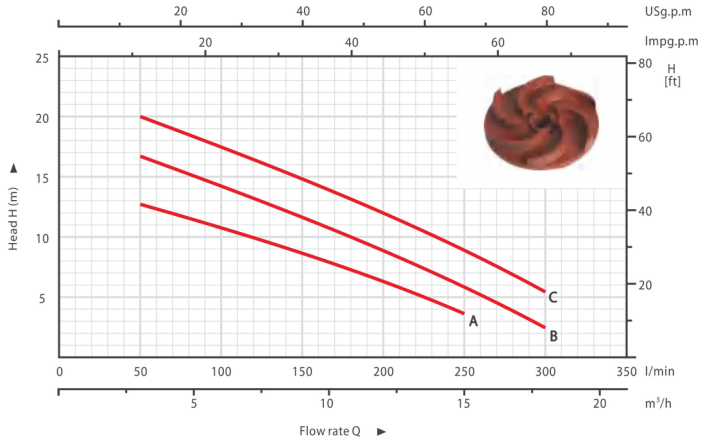

NO.	MODEL	POWER kW	POWER HP	Q (m³/h)	0	3	6	9	12	15	18
				Q (l/min)	0	50	100	150	200	250	300
A	CUT-800C5	0.8	1	H (m)	14	12.7	10.7	8.4	6.2	3.3	
B	CUT-1100C5	1.1	1.5	H (m)	19	16.8	14.3	11.7	9	6.2	2.5
C	CUT-1500C5	1.5	2	H (m)	22	20	17.3	14.3	11.2	8.2	5.2

TECHNICAL DATA

NO.	MODEL	OUTLET (inch)	PARTICAL (Φ mm)	N.W. (kg)	L × W × H (mm)
A	CUT-800C5	2"	5	21.5	285 × 220 × 510
B	CUT-1100C5	2"	5	23	285 × 220 × 530
C	CUT-1500C5	2"	5	26	285 × 220 × 560

Performance values at n = 2850 rpm, 50 Hz. Specifications are subject to change without notice.