TRUE UNION BALL VALVE WITH COMPRESSION FITTINGS “334”



TECHNICAL FEATURES

- True union ball valve with compression fittings for swimming pools and water supply systems.
- Fixed ball support and radial disassembly.
- Compression fittings on both sides for connection to metric series PE pipes.


Shown on the title band: DN 15 ÷ 25.

TECHNICAL SPECIFICATIONS

Construction	True union grey PVC ball valve with compression fittings, with fixed ball support and radial disassembly
Size range	DN 15 ÷ 25
Nominal pressure	PN 16 with water at 20 °C
Temperature range	0 °C ÷ 60 °C
Coupling standards	Compression fittings: ISO 17885
Valve material	PVC-U
Seal material	EPDM (O-ring) PE (ball seats)
Control options	Manual control

TRUE UNION BALL VALVE WITH COMPRESSION FITTINGS “334”

OVERALL DIMENSION

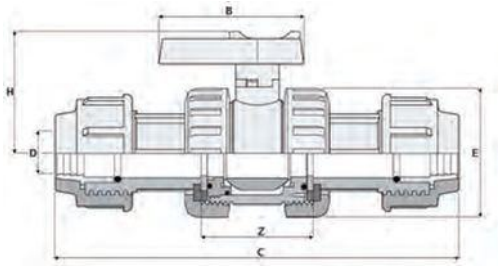

1V334


True union grey PVC ball valve, provided with compression fittings to connect PE ISO metric pipes to both sides, with fixed ball support and radial disassembly. EPDM seals. PE ball seats.

D	PN	DN	C	E	H	B	Z	g	CODE
20	16	15	175	50	50	57	74	200	1V33420000W
25	16	20	195	59	55	66	85	300	1V33425000W
32	16	25	215	68	67	75	85	450	1V33432000W

Dimensions in mm; weight (g) in grams.

TRUE UNION BALL VALVE WITH COMPRESSION FITTINGS “334”

COMPONENTS

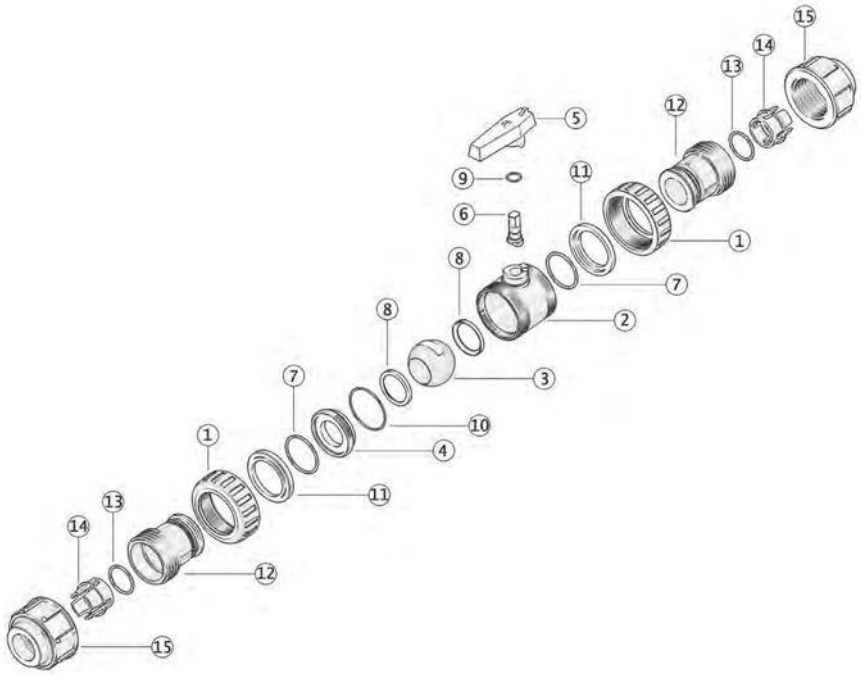

No.	COMPONENT	MATERIAL	QTY	No.	COMPONENT	MATERIAL	QTY
1	Nut	PVC-U	2	9	Stem O-ring	EPDM	1
2	Body	PVC-U	1	10	Radial O-ring	EPDM	1
3	Body	PVC-U	1	11	Split ring	PVC-U	2
4	Support	PVC-U	1	12	Body compr. fitting	PVC-U	2
5	Handle	PVC-U	1	13	Compr. fitting O-ring	NBR	2
6	Stem	PVC-U	1	14	Clinching ring	POM	2
7	Socket O-ring	EPDM	2	15	Compr. fitting nut	PP	2
8	Ball seat	PE	2				

Specifications are subject to change without notice.