

PVC-U WALL ENTRY AND TANK CONNECTOR “AP3 / AS3 / ASGP”



TECHNICAL FEATURES

- Material: PVC-U.
- AP3: Wall entry with female thread – 2 sizes; PN 16.
- AS3: Tank connector with solvent weld spigot, threaded joint with tightening nut and flat gasket in EPDM – 5 sizes; PN 16.
- ASGP: Flat gasket for AS3 – D 16 ÷ 40 mm.


OVERALL DIMENSION

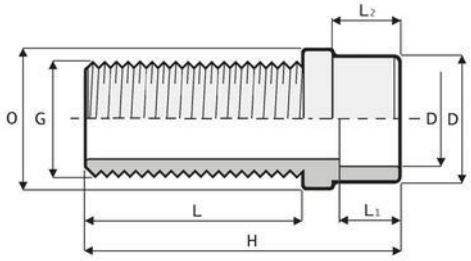

AP3

Wall entry with female thread.

D1 x D x G	PN	L	L1	L2	H	O	g	CODE
40 x 50 x 1"1/2	16	106	27	31	148	55	150	1RAP340F00
50 x 63 x 2"	16	100	32	38	148	68	220	1RAP350G00




AS3

Tank connector with solvent weld spigot, threaded joint with tightening nut and flat gasket in EPDM.

R x d x R1	PN	A	Ch	L	L1	L2	H	P	K	g	CODE
3/4" x 16 x 1/2"	16	44	33	47	15	14	61	3	14	53	1RAS316B00
1" x 20 x 3/4"	16	58	46	49	16	16	65	3	16	108	1RAS320C00
1"1/4 x 25 x 1"	16	62	50	52	19	19	70	3	18	142	1RAS325D00
1"1/2 x 32 x 1"	16	76	60	54	19	22	73	3	19	192	1RAS332D00
2" x 40 x 1"1/2	16	92	79	60	21	26	81	3	21	337	1RAS340F00

PVC-U WALL ENTRY AND TANK CONNECTOR “AP3 / AS3 / ASGP”



ASGP

Flat gasket for AS3.

D	CODE
16	GP0195E
20	GP2299E
25	GP0200E
32	GP0201E
40	GP0202E

Dimensions in mm; weight (g) in grams. Specifications are subject to change without notice.