STAINLESS STEEL SPOT LIGHT WITH NICHE



TECHNICAL FEATURES

- Mirror-polished SS 316 stainless steel body, corrosion resistant.
- Energy-efficient 3W LED light source, available in White, Warm White and RGB.
- IP68 waterproof, suitable for swimming pools and underwater use.
- 30° light beam angle with PWM dimming support.
- High-light-transmission tempered glass for effective illumination.
- Clamp-type fixing: two stainless steel spring clamps hold the light firmly in its niche.
- Input voltage: AC 12V / DC 12V, with 2 m cable.
- Supplied with mounting niche (Ø55 × H 78 mm).



Front view
Ø62 mm SS 316 trim



Light unit
With spring clips



Light + niche
Supplied together




Installed
With 2 m cable

MODELS

ITEM CODE	DIAMETER	POWER	COLOUR	INPUT VOLTAGE	CABLE LENGTH	IP GRADE
AT-62N-W-AC	62 mm	3W	White	AC 12V	2 m	IP68
AT-62N-WW-AC	62 mm	3W	Warm White	AC 12V	2 m	IP68
AT-62N-RGB-AC	62 mm	3W	RGB	AC 12V	2 m	IP68
AT-62N-W-DC	62 mm	3W	White	DC 12V	2 m	IP68
AT-62N-WW-DC	62 mm	3W	Warm White	DC 12V	2 m	IP68
AT-62N-RGB-DC	62 mm	3W	RGB	DC 12V	2 m	IP68

STAINLESS STEEL SPOT LIGHT WITH NICHE

OVERALL DIMENSION

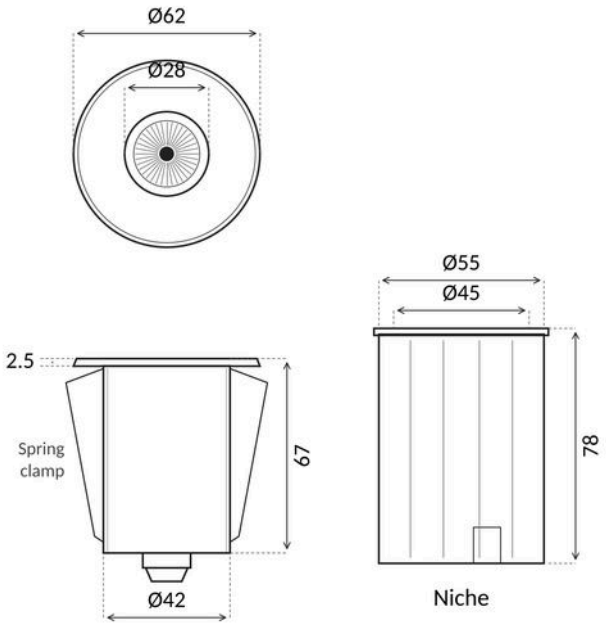

DIMENSIONS

Trim (front) diameter	Ø62 mm, 2.5 mm thick
Light opening	Ø28 mm
Body diameter	Ø42 mm
Light height	67 mm
Niche	Ø55 mm outer / Ø45 mm inner, height 78 mm
Fixing	2 stainless steel spring clamps
Cable	2 m

Dimensions in mm. Specifications are subject to change without notice.